



LG GW300 Teardown

A basic phone, that I used a few years ago. Found lying around so decided to make a teardown of it!

Written By: James



INTRODUCTION

I have tried to include as much detail as possible in this teardown. I have even inspected the chips on the mainboard! Thanks for looking, and I hope you find this useful.

Step 1 — LG GW300 Teardown



- Found this phone lying around, so decided to make a teardown of it!

Step 2



- First, remove the backplate by pushing the button at the top of the back of the phone.

Step 3



- From here there are six screws we have to remove.


⚠ But first... lemme take a battery out!

Step 4




- Get a thin opening tool and slide it around the bezel of the device.
- ⚠ Make sure you put it in the correct place, behind the silver bezel of the front of the phone!

Step 5

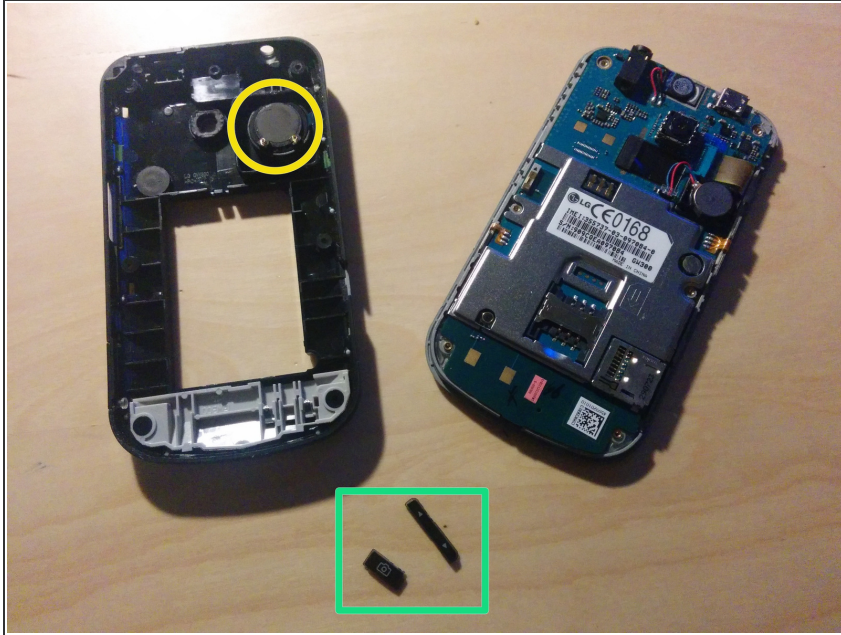

- The front and back of the device should separate.
- Two buttons should come off after you have removed the back.
- This is the rear speaker.

Step 6

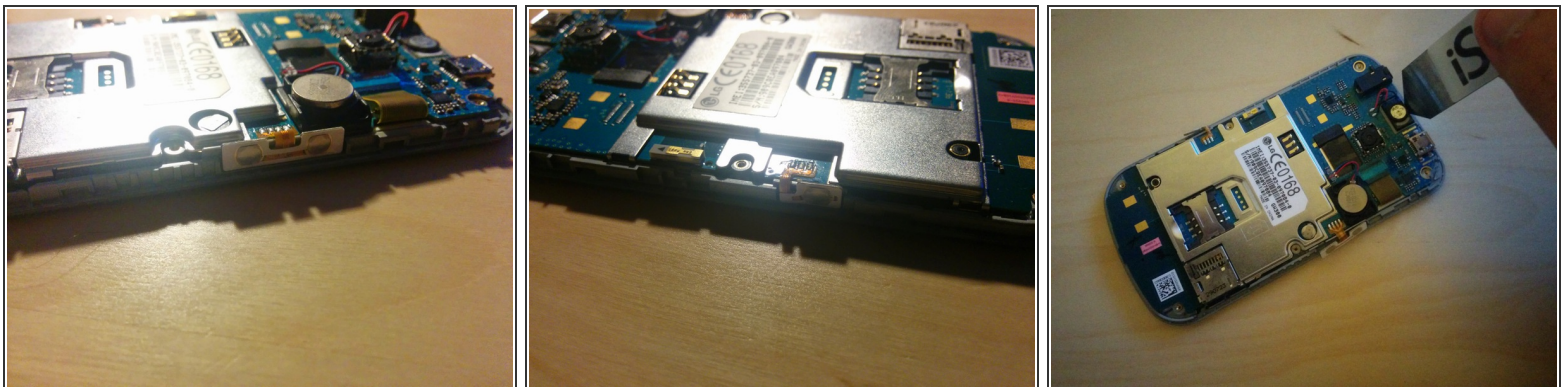

- Both of these buttons need to be pried from the front casing to allow the mainboard to come away from the front housing.

⚠ These buttons are soldered to the mainboard so make sure you don't break them!

- The front speaker also has to be pried from the front housing.

Step 7




- The main board can then be lifted from the front housing.

Step 8




- The buttons on the front housing can then be pushed out through the back of the housing.

Step 9

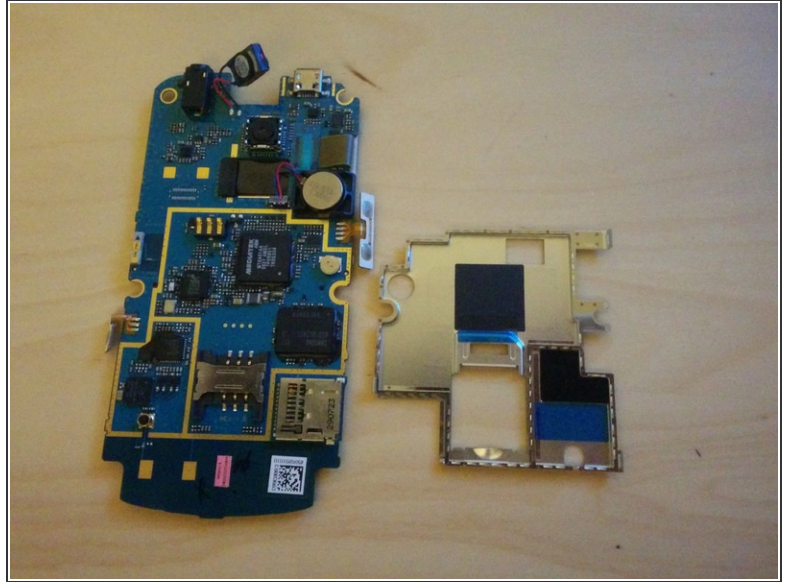


- The EMI shield can be removed by unclipping the clips on the side of the device.

Step 10

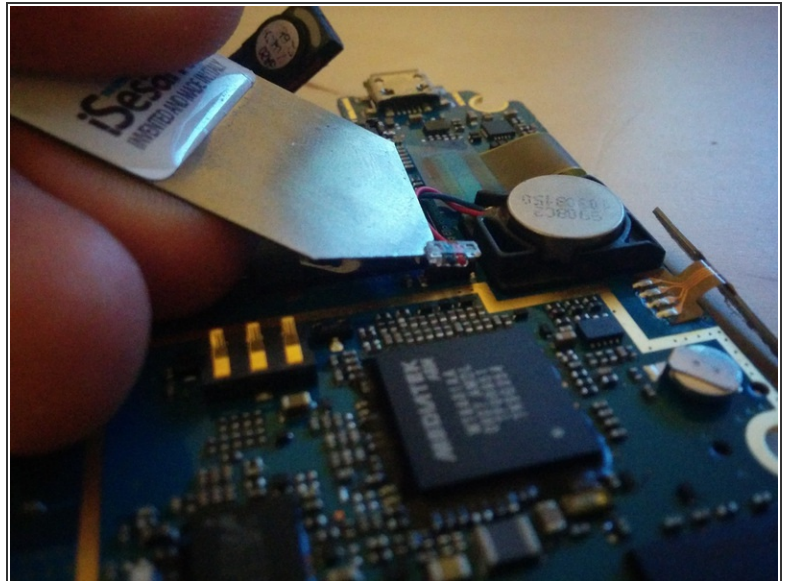

- In the centre of the picture is the vibration module. It can be unclipped to remove it.


Step 11

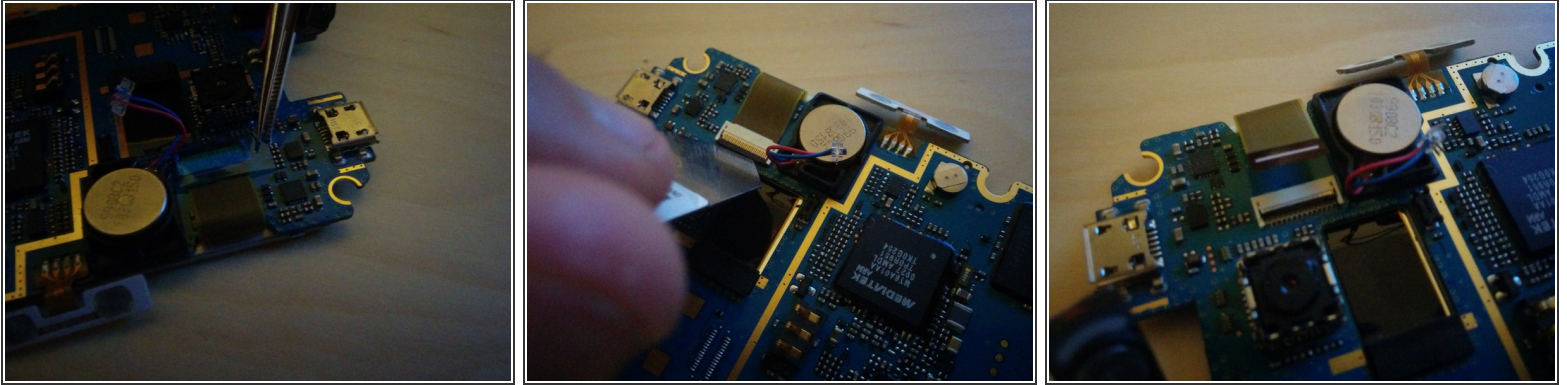

- The LCD ribbon cable and connector are under a plastic sheet that has to be removed.
- The ribbon cable can then be take out of the connector

⚠ The ribbon connector is very fragile, so be careful when lifting the lever.

Step 12

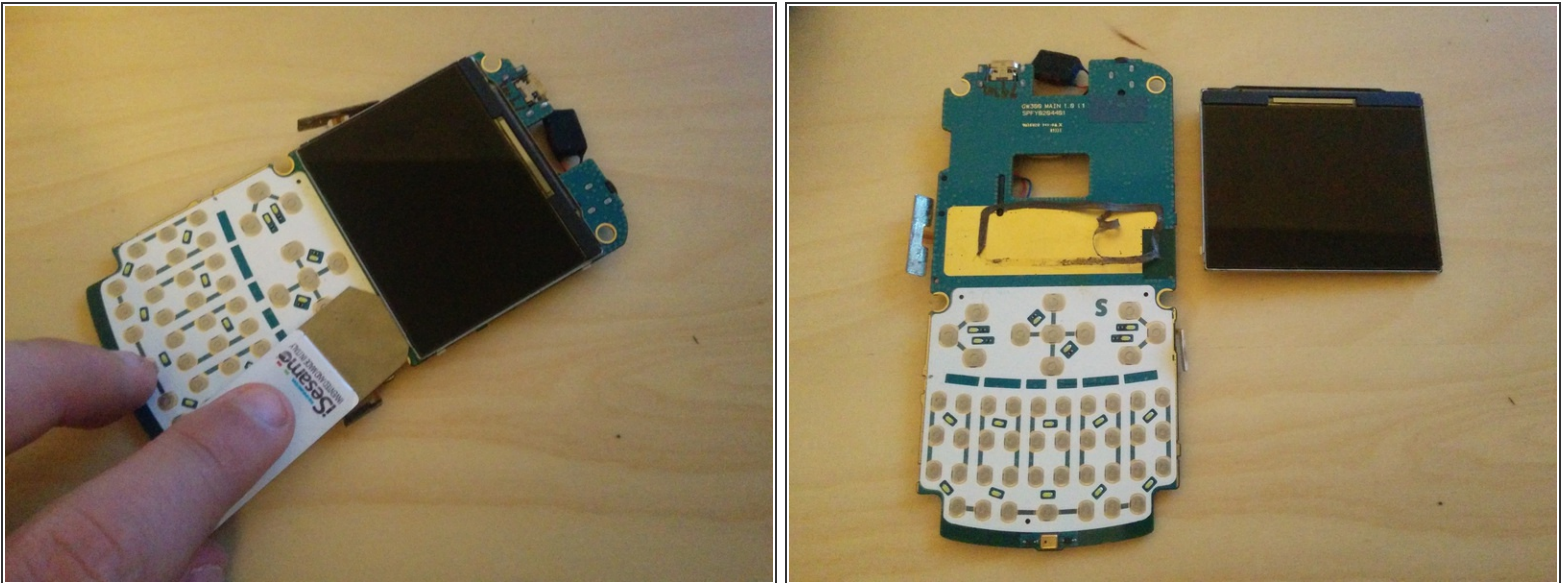

- Use a thin opening tool to separate the LCD from the main board.

⚠ Do this slowly and carefully as the screen can easily crack or bleed.



To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-07-03 10:52:20 PM.